


Please type a plus sign (+) inside this box → +



HDP/SB/21 based on PTO/SB/21 (08-00)

*THW*  
*AF*  
*AF*

## TRANSMITTAL FORM

(to be used for all correspondence after initial filing)

Application Number	09/919,020
Filing Date	July 31, 2001
Inventor(s)	James T. LAGROTTA et al.
Group Art Unit	2642
Examiner Name	Marie C. Ubiles
Attorney Docket Number	29250-002151/US

### ENCLOSURES (check all that apply)

<input checked="" type="checkbox"/> Fee Transmittal Form  <input checked="" type="checkbox"/> Fee Attached  <input type="checkbox"/> Amendment <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s)  <input type="checkbox"/> Extension of Time Request  <input type="checkbox"/> Express Abandonment Request  <input type="checkbox"/> Information Disclosure Statement <input type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Response to Missing Parts/Incomplete Application <input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Assignment Papers (for an Application)  <input type="checkbox"/> Letter to the Official Draftsperson and _____ Sheets of Formal Drawing(s)  <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application  <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address  <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____	<input type="checkbox"/> After Allowance Communication to Group  <input type="checkbox"/> LETTER SUBMITTING APPEAL BRIEF AND APPEAL BRIEF (w/clean version of pending claims) <input checked="" type="checkbox"/> Appeal Communication to Group (Notice of Appeal, <u>Brief</u> , Reply Brief) <input type="checkbox"/> Proprietary Information  <input type="checkbox"/> Status Letter  <input type="checkbox"/> Other Enclosure(s) (please identify below):		
<table border="1"><tr><td>Remarks</td><td></td></tr></table>			Remarks	
Remarks				

### SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT

Firm or Individual name	Harness, Dickey & Pierce, P.L.C.	Attorney Name	John E. Curtin	Reg. No.	37,602
Signature					
Date	February 10, 2006				


--

**FEE TRANSMITTAL  
for FY 2005**

Effective 10/01/2004. Patent fees are subject to annual revision.

☐ Applicant claims small entity status. See 37 CFR 1.27**TOTAL AMOUNT OF PAYMENT** (\$) 500.00**Complete if Known**

Application Number	09/919,020
Filing Date	July 31, 2001
First Named Inventor	James T. LaGrotta
Examiner Name	Karen L. Le
Art Unit	2642
Attorney Docket No.	29250-002151/US

**METHOD OF PAYMENT (check all that apply)**
☒ Check ☐ Credit card ☐ Money ☐ Other ☐ None  
Order
☒ Deposit Account:Deposit  
Account  
Number

08-0750

Deposit  
Account  
Name

Harness, Dickey &amp; Pierce, PLC

**The Director is authorized to: (check all that apply)**
☐ Charge fee(s) indicated below ☒ Credit any overpayments  
☒ Charge any additional fee(s) during the pendency of this application  
☐ Charge fee(s) indicated below, except for the filing fee  
to the above-identified deposit account.
**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1011	300	2011	150	Utility filing fee	
1012	200	2012	100	Design filing fee	
1013	200	2013	100	Plant filing fee	
1014	300	2014	150	Reissue filing fee	
1005	200	2005	100	Provisional filing fee	
<b>SUBTOTAL (1)</b>					<b>(\$) 0</b>

**2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE**

	Total Claims	Extra Claims	Fee from below	Fee Paid
Total Claims	22	-30 **	0	0
Independent Claims	5	-5 **	0	0
Multiple Dependent				0

Large Entity		Small Entity		Fee Description
Fee Code	Fee (\$)	Fee Code	Fee (\$)	
1202	50	2202	25	Claims in excess of 20
1201	200	2201	100	Independent claims in excess of 3
1203	360	2203	180	Multiple dependent claim, if not paid
1204	200	2204	100	** Reissue independent claims over original patent
1205	50	2205	25	** Reissue claims in excess of 20 and over original patent

\*\*or number previously paid, if greater; For Reissues, see above

**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Small Entity

Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid
1051	130	2051	65	Surcharge - late filing fee or oath	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet.	
1053	130	1053	130	Non-English specification	
1812	2,520	1812	2,520	For filing a request for reexamination	
1804	920*	1804	920*	Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action	
1251	120	2251	60	Extension for reply within first month	
1252	450	2252	225	Extension for reply within second month	
1253	1020	2253	510	Extension for reply within third month	
1254	1,590	2254	795	Extension for reply within fourth month	
1255	2,160	2255	1080	Extension for reply within fifth month	
1401	500	2401	250	Notice of Appeal	500
1402	500	2402	250	Filing a brief in support of an appeal	
1403	1000	2403	500	Request for oral hearing	
1452	500	2452	250	Petition to revive - unavoidable	
1453	1500	2453	750	Petition to revive - unintentional	
1501	1400	2501	700	Utility issue fee (or reissue)	
1502	800	2502	400	Design issue fee	
1460	130	1460	130	Petitions to the Commissioner	
1807	50	1807	50	Processing fee under 37 CFR 1.17 (q)	
1806	180	1806	180	Submission of Information Disclosure Stmt	
8021	40	8021	40	Recording each patent assignment per property (times number of properties)	
1809	790	2809	395	Filing a submission after final rejection (37 CFR § 1.129(a))	
1810	790	2810	395	For each additional invention to be examined (37 CFR § 1.129(b))	
1801	790	2801	395	Request for Continued Examination (RCE)	

Other fee (specify) \_\_\_\_\_

\*Reduced by Basic Filing Fee Paid **SUBTOTAL (3)** **(\$)500****4. SEARCH/EXAMINATION FEES**

1111	500	2111	250	Utility Search Fee	
1112	100	2112	50	Design Search Fee	
1113	300	2113	150	Plant Search Fee	
1114	500	2114	250	Reissue Search Fee	
1311	200	2311	100	Utility Examination Fee	
1312	130	2312	65	Design Examination Fee	
1313	160	2313	80	Plant Examination Fee	
1314	600	2314	300	Reissue Examination Fee	

**SUBTOTAL (4)** **(\$)0****SUBMITTED BY**

Complete (if applicable)

Name (Print/Type)

John E. Curth

Registration No.  
(Attorney/Agent)

37,602

Telephone


(703)668-8000

Signature

Date

February 10, 2006

**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.



**IN THE U.S. PATENT AND TRADEMARK OFFICE**

Appellants: James T. LaGrotta et al.  
Application No.: 09/919,020  
Art Unit: 2642  
Filed: July 31, 2001  
Examiner: Karen L. Le  
For: USE OF OVER-THE-AIR OPTICAL LINK  
WITHIN A GEOGRAPHICALLY DISTRIBUTED  
BASE STATION  
Attorney Docket No.: 29250-002151/US

---

**APPLICANT'S BRIEF ON APPEAL**

**MAIL STOP APPEAL BRIEF - PATENTS**

Customer Service Window  
Randolph Building  
401 Dulany Street  
Alexandria, VA 22314


February 10, 2006

APPELLANT'S BRIEF ON APPEAL  
U.S. Application No.: 09/835,376  
Atty. Docket: 29250-000902/US



## TABLE OF CONTENTS

	<u>Page</u>
APPELLANT'S BRIEF ON APPEAL.....	1
I. REAL PARTY IN INTEREST .....	1
II. RELATED APPEALS AND INTERFERENCES.....	1
III. EVIDENCE SUBMITTED UNDER 37 CFR 1.130, 1.131, OR 1.132.....	1
IV. DECISIONS RENDERED BY A COURT OR THE BOARD IN RELATED APPEALS AND INTERFERENCES SECTION .....	1
V. STATUS OF CLAIMS .....	1
VI. STATUS OF AMENDMENTS .....	2
VII. SUMMARY OF CLAIMED SUBJECT MATTER.....	2
VIII. GROUNDS OF REJECTION TO BE REVIEWED ON APPEAL.....	13
IX. ARGUMENTS.....	13
A. The Section 103 Rejections.....	13
X. CONCLUSION.....	16
APPENDIX A - Claims Appendix	
APPENDIX B - Figure 1 and 2	
APPENDIX C - Figures 3	
APPENDIX D - Figure 4	
APPENDIX E - Figure 5	



**APPELLANT'S BRIEF ON APPEAL UNDER 37 C.F.R. §41.37**

**I. REAL PARTY IN INTEREST:**

The real party in interest in this appeal is Lucent Technologies Inc. Assignment of the application was submitted to the U.S. Patent and Trademark Office on July 31, 2001, and recorded on the same date at Reel 012334, Frame 0150.

**II. RELATED APPEALS AND INTERFERENCES:**

There are no known appeals or interferences that will affect, be directly affected by, or have a bearing on the Board's decision in this Appeal.

**III. EVIDENCE SUBMITTED UNDER CFR 1.130, 1.131, OR 1.132:**

None.

**IV. DECISIONS RENDERED BY THE COURT OR THE BOARD IN  
RELATED APPEALS AND INTERFERENCES SECTION:**

None.

**V. STATUS OF CLAIMS:**

Claims 1-7, 10-13, 16-19, 22-25 and 28-30 are pending in the application, with claims 1, 10, 17, 24 and 29 being written in independent form.

Claims 1-7, 10-13, 16-19, 22-25 and 28-30 remain finally rejected under 35 U.S.C. §103(a). Claims 1-7, 10-13, 16-19, 22-25 and 28-30 are being appealed.

**VI. STATUS OF AMENDMENTS:**

A Request for Reconsideration ("Request") was filed on October 7, 2005. In an Advisory Action dated November 16, 2005, the Examiner stated that the Request was considered; however, the Request did not place the application in condition for allowance.

**VII. SUMMARY OF CLAIMED SUBJECT MATTER:**

**(i). Overview of the Subject Matter of the Independent Claims**

One possible way to avoid the expense and difficulty of using cable is to connect the two sections of an RF base station through a wireless RF connection that operates in the same frequency band as one used for communication between the RF base station and terminals (e.g. mobile or fixed telephones, computers, etc.). A problem with such a wireless RF connection is that it reduces the frequencies an RF base station can use in communicating with terminals. This, in turn, disadvantageously reduces the capacity of the system.

Another possibility is to connect the two sections of the RF base station through a microwave connection. However, such a connection exposes the system to significant environmental interference from rain and fog, which reduces signal quality. Furthermore, a microwave connection requires licensed frequency spectrum to be purchased for its operation.

The present invention is directed to solving the above problems. The present invention is advantageously less expensive than laying cable through city streets. It does not reduce the capacity of the system. It is not subject to significant environmental interference. It, currently, does not require licensed frequency spectrum to be purchased for its operation. Overall, the present invention allows an RF base station to service a location where real estate is

expensive at a much lower cost without reducing the capacity or the signal quality of the system.

In accordance with the present invention, communications between two sections of an RF base station of a wireless communication system is implemented using an over-the-air optical link. In particular, the present invention provides an RF base station comprising: 1) an RF section, which may include an RF antenna, and 2) a non-co-located processing and/or control section, where (1) and (2) are coupled using wireless optical communication equipment.

Although wireless optical communication equipment has been used for so-called last mile transmission in wireless communication systems, it remained for the applicants to realize that it is advantageous to couple the two disparate technologies in the specific context of a geographically distributed base station. Significant in this regard is the fact that additional equipment would be needed to process the RF signal into optical signal and visa versa, therefore, increasing the cost of coupling two such types of equipment. It remained for the applicants to realize that the disadvantages of the additional equipment to process the signal so that it can be used with the optical and the RF equipment are outweighed in this particular context by the virtue of reduction in cost realized by not having to lay cable to connect non-co-located sections of an RF base station. Moreover, each of these types of communication equipment is capable of operating independently to communicate information between two endpoints. Thus, without the motivation provided by the applicant, there is no incentive to combine these two types of equipment, since each can be used without the other for communication between two endpoints.

**(ii). Additional Text from the Specification in Support of the Claims**

FIG. 1 (Appendix B) illustrates a portion of RF base station 105 of a wireless communication system. RF base station 105 includes an RF section that comprises RF antenna 110 and optionally related RF hardware, such as RF-module 320, which is connected to RF antenna 110. The RF section is located at the top of building 115 which is at an expensive location, such as the heart of the downtown or cultural center of a metropolitan area. RF base station 105 also includes processing/control section 120, which is located at a less expensive location, such as the basement of building 125 on the outskirts of the metropolitan area. Processing/control section 120 connects RF base station 105 to a mobile switching center (MSC) (not shown), which is connected to local and/or long-distance transmission network, such as a public switched telephone network.

RF antenna 110 receives RF signals from terminals. RF-module 320 amplifies and filters the RF signals received on RF-antenna 110 and then converts these RF signals into digital signals. The digital signals are sent to processing/control section 120, which processes these digital signals and sends them to the MSC.

Similarly, processing/control section 120 receives digital signals from the MSC, processes these digital signals, and sends them to the RF section. In the RF section RF-module 320 converts the digital signals received from processing/control signal into RF signals, amplifies and filters these RF signals, and sends the result to RF antenna 110 for transmission. RF antenna 110 then transmits these RF signals to terminals.

The two sections of RF base station 105, i.e. the RF section and processing/control section 120, are connected by cable 130. Cable 130 runs from RF-module 320 through conduit 140, and through building 125 (also



shown partially in section), to processing/control section 120. Cable 130 may also connect RF antenna 110 and RF-module 320, in which case cable 130 also runs through building 115 (shown partially in section) to RF-module 320. As described above, it may be difficult and/or expensive to provide such a cable connection from the RF section to the processing/control section.

FIG. 2 (Appendix C) illustrates a portion of RF base station 205 where, in accordance with the present invention, the two sections of RF base station 205 communicate with each other over an over-the-air optical link, also referred to as a wireless optical link. RF base station 205 includes RF wireless communication equipment, particularly, an RF section, which includes RF antenna 110 and RF-module 320, and processing and/or control section (hereinafter "processing/control section") 220. RF base station 205 also includes wireless optical communication equipment, such as optical antennas 210 and 230, one optical antenna located near each of the sections, and equipment modules 240 and 250 to connect optical antennas 210 and 230 to RF antenna 110 and processing/control section 220, respectively. As can be seen in FIG. 2, equipment module 250 is incorporated into processing/control section 220, allowing equipment module 250 to possibly share components and/or protective casings with processing/control section 220. Alternatively, equipment module 250 may be separate from processing/control section 220, in which case processing/control section 220 could be identical to processing/control section 120 shown in FIG. 1. As can also be seen in FIG. 2, RF-module 320 is incorporated into equipment module 240, allowing RF-module 320 to share components and/or protective casings with the equipment module. Alternatively, RF-module 320 may separate from equipment module 240.

As shown in FIG. 2, RF antenna 110 is still located at the top of building 115. Optical antenna 210, which is typically a specific purpose telescope, such as an optical telescope, is also located at the top of building 115 and is coupled

to the RF antenna 110 through equipment module 240. Equipment module 240 allows information received on RF antenna 110 to be transmitted on optical antenna 210 and visa versa. (Power for equipment module 240 can be provided through any manner, such as an AC power connection through an outlet in building 115, or a battery coupled to the equipment module).

FIG. 3 (Appendix D) shows equipment module 240 in more detail. Equipment module 240 includes optical-module 310 and RF-module 320. Optical-module 310 includes optical transmitter 330 and optical receiver 340. Optionally, both the optical transmitter 330 and optical receiver 340 are coupled to fiber-coupling interface 350, which couples optical transmitter 330 and optical receiver 340 to optical antenna 210. Optical transmitter 330 includes a laser, such as semiconductor laser 333, that generates a light beam, and modulator 337 that modulates the light beam using the signal received from RF-module 320 and electrical/optical signal interface 370, as described below. Optical transmitter 330 also includes an optical amplifier, not shown, that amplifies the resulting modulated light beam. The emitting facet of the laser (or an optical fiber to which the laser is coupled through the fiber-coupling interface) lies at the front focal plane of optical antenna 210.

Optical receiver 340 includes photodetector 343. Photodetector 343 (or an optical fiber connected to the photodetector through the fiber-coupling interface) is positioned at the focal plane of optical antenna 210. Photodetector 343 detects the received light beam and converts it into an analog electrical signal. Additionally, optical receiver 340 can also include demodulator 347 for recovering from this analog electrical signal the signal carried by the light beam. The signals recovered from the demodulator will typically be digital signals. For a more detailed discussion of wireless optical systems, see, for example, P. F. Szajowski, "Key Elements of High-Speed WDM Terrestrial Free-Space Optical Communications Systems," SPIE Paper No. 3932-01, Photonics West (January, 2000); and International Patent Application entitled "Wireless

Fiber-Coupled Telecommunication Systems Based on Atmospheric Transmission of Laser Signals", Publication Number WO 00/04653; and U.S. patent application entitled "Point-to-Multipoint Free-Space Wireless Optical Communication System", Ser. No. 09/679,930, all incorporated herein by this reference.

Optical-module 310 is coupled to RF-module 320. RF-module 320 includes RF filter 360, amplifier 364, and radio 368. Filter 360 filters the signals received on RF antenna 110, amplifier 364 then amplifies these signals and passes them to radio 368. Radio 368 converts these filtered and amplified RF signals into digital signals. Radio 368 also converts the digital signals recovered by demodulator 347 into RF signals. The later RF signals are then amplified in amplifier 364, filtered, and then passed to RF antenna 110.

Optionally, equipment module 240 also includes optical/electrical signal interface 380 and electrical/optical signal interface 370. Optical/electrical signal interface 380 is coupled between RF-module 320 and optical receiver 340. Electrical/optical signal interface 370 is coupled between RF-module 320 and optical transmitter 330. Optical/electrical signal interface 380 converts the signal carried by the light beam, and recovered in the optical module, into a signal that can be processed by RF-module 320. Electrical/optical signal interface 370 converts the signal processed by RF-module 320 into a signal that can be modulated onto on the light beam. In the illustrative embodiment, optical/electrical signal interface 380 decodes the signal that optical-module 310 recovers from the analog electrical signal. As described above, the analog electrical signal is obtained from the light beam. This decoded signal is typically in digital form. Optical/electrical signal interface 380 then passes the decoded signal to RF-module 320, where the decoded digital signal is converted into an RF signal, and otherwise prepared for transmission on RF antenna 110. Electrical/optical signal interface 370 encodes the digital signal provided by the RF-module. The resulting encoded digital signal is passed to optical-module

310 where it is used to modulate the light beam. As described above, the light beam is then amplified and transmitted on optical antenna 210, as shown in FIG. 2.

The processed light beam is received by optical antenna 230, which is typically similar to optical antenna 220. Optical antenna 230 is located at a less expensive location than RF antenna 110 and optical antenna 210. For example optical antenna 230 can be located at the top of building 125 on the outskirts of the metropolitan area. Optical antenna 230 is coupled to processing/control section 220 through equipment module 250. Processing/control section 220 is similarly located at the less expensive location, such as, for example, the basement of building 125. Thus, the RF section and processing/control section 220, and therefore the RF antenna 110 and processing/control section 220, are non-co-located and are a significant distance from each other. This distance may be any distance at which real estate prices differ, such as for example, any distance greater than or equal to 10 meters. Thus, in areas where real estate prices change significantly in the space of a few buildings it may be beneficial to separate RF antenna 110 and processing/control section 220 by 10 meters, and in other areas they may be 1/2 mile or more apart.

Equipment module 250 allows information received at processing/control section 220 to be transmitted on optical antenna 230 and information received on optical antenna 230 to be processed by processing/control section 220. Equipment module 250 is similar to equipment module 240 except it does not include an RF-module. Thus, the optical antennas are adapted to communicate signals between the two sections of the RF base station.

In operation, when an RF signal is received from a terminal by RF antenna 110 the RF signal is passed to equipment module 240, shown in FIG. 3. Particularly, the RF signal is passed to RF-module 320 where filter 360 filters the RF signal. Amplifier 364 amplifies the filtered RF signal. Radio 368

then converts the filtered and amplified RF signal into a digital signal. The digital signal is sent to electrical/optical signal interface 370 where, as described above, the digital signal provided by radio 368 is encoded. The resulting encoded digital signal is passed to optical-module 340 where modulator 337 modulates this signal onto a light beam generated by semiconductor laser 333. The resulting processed light beam is amplified in optical amplifier and transmitted by optical antenna 210. The signals received by RF antenna 110 conform to a predefined wireless communication standard, such as for example a code division modulation, CDMA, standard such as IS-95, or a time division modulation, TDMA, standard such as IS-136. The signals communicated by optical antenna 210 represent information that conforms to the same predefined wireless communication standard.

The processed light beam is received by optical antenna 230 and passed to optical receiver 340 of equipment-module 250, shown in FIG. 4 (Appendix E), where photodetector 343 converts the received light beam into an analog electrical signal. This analog electrical signal is demodulated in demodulator 347 to recover the signal carried by light beam. Optical/electrical signal interface 380 decodes the signal recovered by demodulator 347, thus recovering the signal provided by radio 368 to electrical/optical signal interface 370. This signal is then passed to processing/control section 220.

Similarly, when a signal is received from the network through the mobile switching center by processing/control section 220, the signal is processed in the processing/control section 220. The resulting signal is then passed to equipment module 250 where the electrical/optical signal interface 370 converts this signal into a form that can be modulated onto on a light beam and passes it to optical-module 340. In optical-module 340 modulator 337 modulates this signal onto a light beam generated by semiconductor laser 333. The resulting processed light beam is amplified in optical amplifier and transmitted by optical antenna 230.

The processed light beam is received by optical antenna 210 and passed to optical receiver 340 of equipment-module 240, shown in FIG. 3, where photodetector 343 converts the received light beam into an analog electrical signal. This analog electrical signal is demodulated in demodulator 347 to recover the signal carried by light beam. Optical/electrical signal interface 380 converts the signal carried by light beam, and recovered in the optical module, into a signal that can be processed by RF-module 320. RF-module 320 then converts this signal into a form in which it can be transmitted on RF-antenna 110. This signal is then transmitted over RF-antenna 110.

Implementing communication between two sections of RF base station 205 using an over-the-air optical link is less expensive than laying cable through city streets. It does not reduce the capacity of the system. It is not subject to significant environmental interference. It, currently, does not require licensed frequency spectrum to be purchased for its operation. Overall, it allows RF base station 205 to service a location where real estate is expensive at a much lower cost without reducing the capacity or the signal quality of the system.

Furthermore, illustratively, many processing/control sections 220 can be located near each other at the outskirts of the metropolitan area. This would allow for a reduction in maintenance and upgrade cost. The RF heads could be designed with high-reliability equipment that is not subjected to frequent upgrades as new features are added to the system. On the other hand, the many circuit cards that contain software, firmware, and hardware (such as processor chips) that are being upgraded more regularly to add features or take advantage of the steady growth speeds and new software algorithms would be located in the processing/control section. Thus, in the present invention, less physical locations would typically need to be visited for upgrades or more frequent maintenance, reducing the cost in time spent traveling to each processing/control section.

Another embodiment of present invention is shown in FIG. 5 (Appendix F). In this embodiment RF base station 505 includes more RF section, and therefore more RF antennas, than processing/control sections. For example, in the illustrative embodiment shown in FIG. 5, one processing and/or control section (hereinafter "processing/control section") 520 services multiple RF sections, each of which includes antennas 110.sub.1, 110.sub.2, 110.sub.3, and 110.sub.4 and RF-modules 320.sub.1, 320.sub.2, 320.sub.3, and 320.sub.4. There is an over-the-air optical link between each of the RF antennas 110.sub.1, 110.sub.2, 110.sub.3, and 110.sub.4 and processing/control section 520. Each of the RF antennas 110.sub.1, 110.sub.2, 110.sub.3, and 110.sub.4 is coupled to a respective optical antenna 210.sub.1, 210.sub.2, 210.sub.3, and 210.sub.4 through a respective equipment module 240.sub.1, 240.sub.2, 240.sub.3, and 240.sub.4. Processing/control section 520 is coupled to optical antenna 530 through equipment module 550. Optical antenna 530 communicates with the multiple optical antennas 210.sub.1, 210.sub.2, 210.sub.3, and 210.sub.4. For a more detailed description on the operation of an optical antenna adapted to communicate with multiple optical antenna see U.S. patent application entitled "Point-to-Multipoint Free-Space Wireless Optical Communication System", Ser. No. 09/679,930. Equipment module 550 allows information received at processing/control section 520 to be transmitted on optical antenna 530 to any of the multiple RF sections and information received on optical antenna 530 from any of the multiple RF sections to be processed by processing/control section 520. Illustratively, equipment module 550 includes an optical-module, an electrical/optical signal interface and an optical/electrical signal interface for each RF section with which optical antenna 530 is designed to communicate.

In addition to the advantages discussed above, the just above described embodiment also allows for a further reduction in equipment costs. This is due

to the fact that complex equipment is consolidated into a fraction of the cell sites, and shares both 1) the links back to the mobile switching center, usually T1 lines, and 2) other equipment such as the physical cabinet, power supplies, heat exchanges, fans, etc. Thus, while each processing/control section 520 would be larger, to service multiple RF antennas, the price will not scale up proportionally, and as the number of RF antennas serviced by the same process/control section increases, so does the savings potential. Moreover, by designing RF base station 550 as described above, most of the upgrades and features can be implemented at processing/control section 520 maintenance and upgrade cost can be further reduced since there are fewer processor/control sections 520 at which to perform maintenance and at which upgrades are performed.

The foregoing is merely illustrative and various alternatives will now be discussed. For example, in the illustrative embodiment the electrical/optical signal interface and the optical/electrical signal interface serve as interfaces between the wireless RF communication equipment and the wireless optical communication equipment. In alternative embodiments of the invention, if the optical transmitter is capable of modulating the signal provided by the RF module directly onto the light beam then the electrical/optical signal interface and optical/electrical signal interface may not be needed and may be left out.

In the illustrative embodiment of the invention the processing/control section is located in the basement of building 125. In alternative embodiments of the invention the processing/control section can be located at any location reasonably near its optical antenna. For example, processing/control section 220 can be located at the top of building 125 next to optical antenna 230.

The block diagrams presented in the illustrative embodiments represent conceptual views of illustrative circuitry embodying the principles of the invention, one or more of the functions of the circuitry represented by the



block diagrams may be implemented in software by one skilled in the art with access to the above descriptions of such functionally.

Thus, while the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art having reference to the specification and drawings that various modifications and alternatives are possible therein without departing from the spirit and scope of the invention.

**VIII. GROUNDS OF REJECTION TO BE REVIEWED ON APPEAL:**

Appellant seeks the Board's review and reversal of the rejection of claims 1-7, 10-13, 16-19, 22-25 and 28-30 under 35 U.S.C. §103(a).

**IX. ARGUMENTS:**

**A.) The Section 103 Rejections**

Claims 1-7, 10-13, 16-19, 20-25 and 28-30 stand rejected under 35 U.S.C. §103(a) as being unpatentable over alleged admitted prior art (Fig.1) in view of Willebrand, U.S. Patent Application No. 2002/0149811 ("Willebrand"). Appellant respectfully disagrees.

Claims 1-16 of the present invention require an RF base station that comprises: (a) first wireless RF communication equipment; (b) wireless optical communication equipment coupled to the first wireless RF communication equipment, and adapted to communicate signals, between the first wireless RF communication equipment and processing/control equipment; wherein (c) the first wireless RF communication equipment and the processing and control equipment are not co-located.

The Examiner acknowledges that the alleged admitted prior art does not disclose items (b); she appears to be silent regarding item (c). To make up for

the deficiencies of the alleged admitted prior art the Examiner relies on Willebrand.

Willebrand, however, like the alleged, admitted prior art does not disclose or suggest a RF base station apparatus having a first wireless RF section that is not co-located with processing and control equipment. Rather, Willebrand's transceivers 104, 214, 216 appear to comprise co-located RF and processing/control equipment.

The Examiner appears to be focusing solely on the wireless optical features of the present claims, and overlooking the fact that claims 1-7, 10-13, 16-19, 20-25 and 28-30 also include non co-located RF equipment and processing/control equipment. Though Willebrand discloses the former it does not disclose or suggest the later. All of the processing and control equipment associated with the transceivers 104, 214, 216 is co-located with the RF/optical transceivers.

Perhaps the Examiner is interpreting Willebrand's network management system 102 as being the processing/control equipment of the present invention. If so, the Examiner has not indicated this. Even if this is the Examiner's intent, the system 102 of Willebrand is not a part of an RF base station apparatus as are the RF and non co-located processing/control sections of the present invention.

Accordingly, Appellant respectfully submits that the subject matter of claims 1-7, 10-13, 16-17, 20-25 and 28-30 would not have been obvious to one of ordinary skill in the art upon reading the disclosures of the alleged admitted prior art and Willebrand either separately, or in combination.

Turning to claims 17-19, 22-25 and 28-30, these claims include the feature of: (a) the modulating of a signal representing an RF signal onto an optical signal; (b) transmitting the feature of the optical signal using wireless optical communication equipment to a processing/ control section; wherein (c) the processing/control section is a significant distance from an RF antenna.

In contrast, the alleged admitted prior art discloses an RF base station with its RF antenna and processing/control sections connected by a cable (i.e., the connection is a "wired" connection); not a wireless connection as required by claims 17-19, 22-25 and 28-30 of the present invention. Willebrand does not make up for this deficiency.

In Willebrand, there is no disclosure or suggestion that the antenna section of an optical transceiver 104 is separated, either wirelessly or wired, by a significant distance from its processing/control section, as is required by claims 17-19, 22-25 and 28-30 of the present invention. Instead, Willebrand appears to disclose the connection of multiple optical transceivers 104 in order to provide alternative communication paths.

In sum, neither the alleged admitted prior art nor Willebrand discloses or suggests wireless optical communication equipment that communicates signals between RF wireless communication equipment (e.g., an antenna) and processing/control equipment, where the RF communication equipment and processing/control equipment are separated by a significant distance.

**X. CONCLUSION:**

Appellant respectfully requests that the members of the Board reverse the Examiner's rejection of claims 1-7, 10-13, 16-17, 20-25 and 28-30 and allow these claims.

The Commissioner is authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 08-0750 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,  
HARNESS, DICKY, & PIERCE, P.L.C.

By: 

John E. Curtin, Reg. No. 37.602  
P.O. Box 8910  
Reston, Virginia 20195  
(703) 668-8000

JEC:ame

**APPENDIX A**  
**CLAIMS APPENDIX**

1. (Previously Presented) An RF base station apparatus, comprising:  
first wireless RF communication equipment; and  
wireless optical communication equipment coupled to the first wireless RF communication equipment,  
the wireless optical communication equipment being adapted to communicate signals between the first wireless RF communication equipment and processing and control equipment, and  
the first wireless RF communication equipment and the processing and control equipment being non-co-located.
2. (Original) The apparatus of claim 1, wherein the first wireless RF communication equipment is at a significant distance from the other equipment of the RF base station.
3. (Original) The apparatus of claim 2, wherein the significant distance is at least ten meters.
4. (Original) The apparatus of claim 1, wherein:  
the first wireless RF communication equipment is adapted to receive signals that conform to a predefined wireless communication standard; and

the signals that the wireless optical communication equipment is adapted to communicate represent information that conforms to the predefined wireless communication standard.

5. (Original) The apparatus of claim 1, wherein the first wireless RF communication equipment comprises an RF antenna.

6. (Original) The apparatus of claim 5, wherein the first wireless RF communication equipment further comprises an RF-module.

7. (Original) The apparatus of claim 1, wherein the wireless optical communication equipment comprises a telescope.

8. (Cancelled)

9. (Cancelled)

10. (Previously Presented) An RF base station, comprising:  
an RF antenna;

first wireless optical communication equipment coupled to an RF communication equipment;

a processing and control section, the processing and control section being at a significant distance from the RF antenna;

second wireless optical communication equipment coupled to the processing and control section; and

the first wireless optical communication equipment being adapted to communicate with the second wireless optical communication equipment.

11. (Original) The apparatus of claim 10, wherein:  
the RF antenna is adapted to receive signals that conform to a predefined wireless communication standard; and  
the signals that the wireless optical communication equipment is adapted to communicate represent information that conforms to the predefined wireless communication standard.

12. (Original) The RF base station of claim 10, further comprising:  
at least one other RF antenna; and  
at least a third wireless optical communication equipment, each being adapted to communicate with the second wireless optical communication equipment; one wireless optical communication equipment being coupled to each RF antenna.

13. (Original) The RF base station of claim 10, wherein the significant distance is at least ten meters.

14. (Cancelled)

15. (Cancelled)

16. (Original) The RF base station of claim 10, wherein:  
the first wireless optical communication equipment comprises a first telescope; and  
the second wireless optical communication equipment comprises a second telescope.

17. (Previously Presented) A method, comprising the steps of:  
receiving an RF signal at an RF antenna of an RF base station;  
modulating a signal representing the RF signal onto an optical signal;  
and

transmitting the optical signal by wireless optical communication equipment to a processing and control section of the RF base station, the processing and control section being at a significant distance from the RF antenna.

18. (Previously Presented) The method of claim 17, further comprising the steps of:

receiving the optical signal on second wireless optical communication equipment of the RF base station,

the second wireless optical communication equipment coupled to the processing and control section of the RF base station; and

obtaining the signal representing the RF signal from the optical signal.

19. (Previously Presented) The method of claim 17, wherein:

signals received by the RF antenna conform to a predefined wireless communication standard; and

the signals transmitted by the wireless optical communication equipment represent information that conforms to the predefined wireless communication standard.

20. (Cancelled)



21. (Cancelled)

22. (Original) The method of claim 17, further comprising the step of processing the RF signal to produce a signal that can be modulated onto an optical signal, wherein this step is performed prior to the modulating step.

23. (Original) The method of claim 17, wherein the wireless optical communication equipment comprises a telescope.

24. (Previously Presented) A method, comprising the steps of:  
obtaining a signal at a processing and control section of equipment of an RF base station, the processing and control section of equipment being at a significant distance from an RF antenna;

modulating a signal representing the signal onto an optical signal; and  
transmitting the optical signal over wireless optical communication equipment to the RF antenna of the RF base station.

25. (Original) The method of claim 24, further comprising the steps of:

receiving the optical signal on second wireless optical communication equipment of the RF base station, the second wireless optical communication equipment coupled to the RF antenna; and

obtaining the signal from the optical signal;  
obtaining an RF signal from the signal;  
transmitting the RF signal on the RF antenna.

26. (Cancelled)

27. (Cancelled)

28. (Original) The method of claim 24, wherein the wireless optical communication equipment comprises a telescope.

29. (Previously Presented) An RF base station apparatus, comprising:

an RF antenna; and

a telescope coupled to the RF antenna, the telescope being adapted to communicate signals between the RF antenna and processing and control equipment of the RF base station,

the RF antenna being at a significant distance from the processing and control equipment of the RF base station, and wherein

signals received by the RF antenna conform to a predefined wireless communication standard, and

the signals communicated by the telescope represent information that conforms to the predefined wireless communication standard.

30. (Original) The apparatus of claim 29, wherein the significant distance is at least ten meters.



FIG. 1

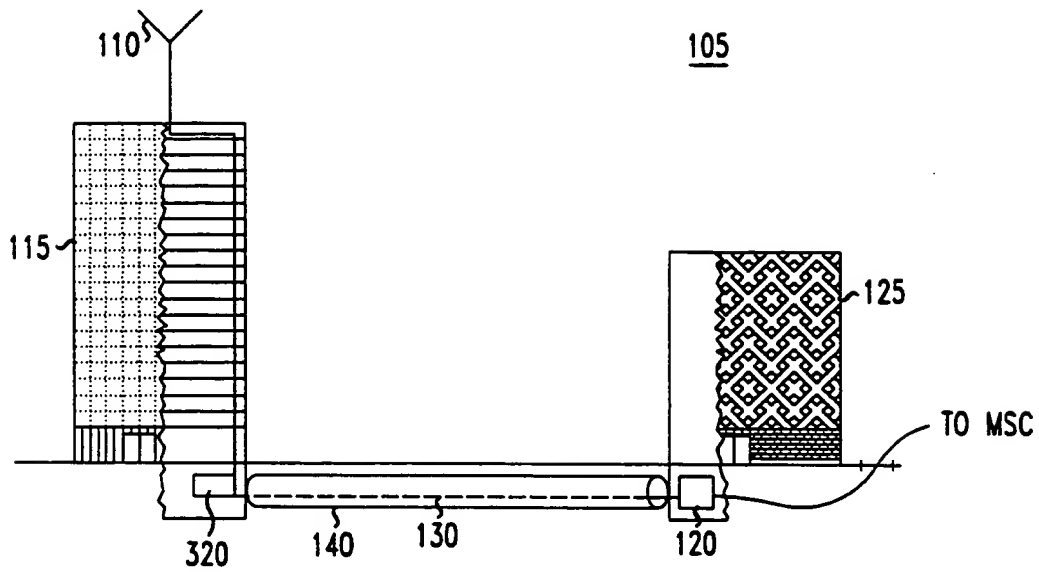


FIG. 2

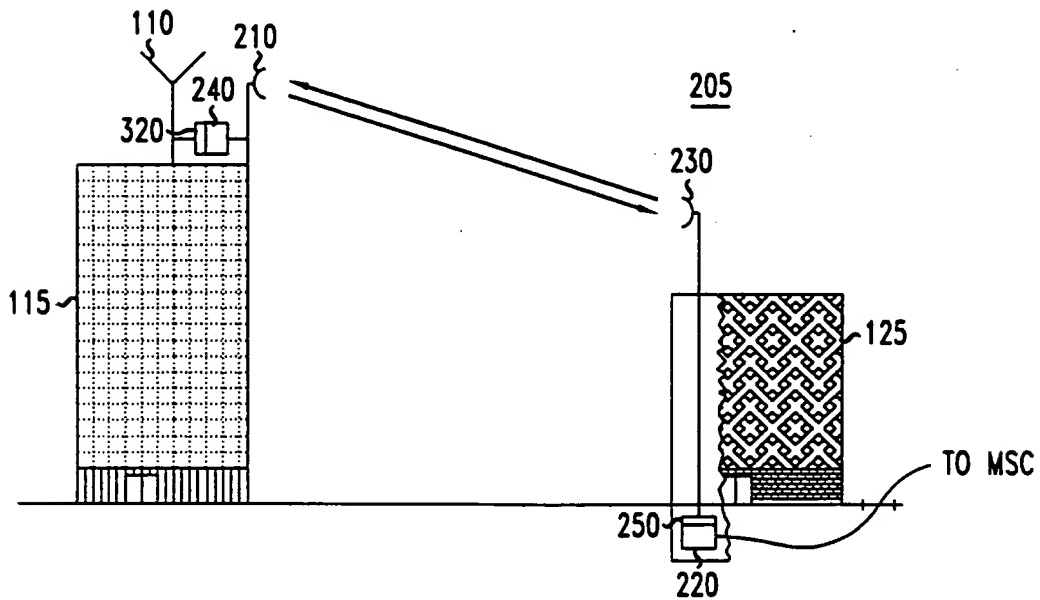


FIG. 3

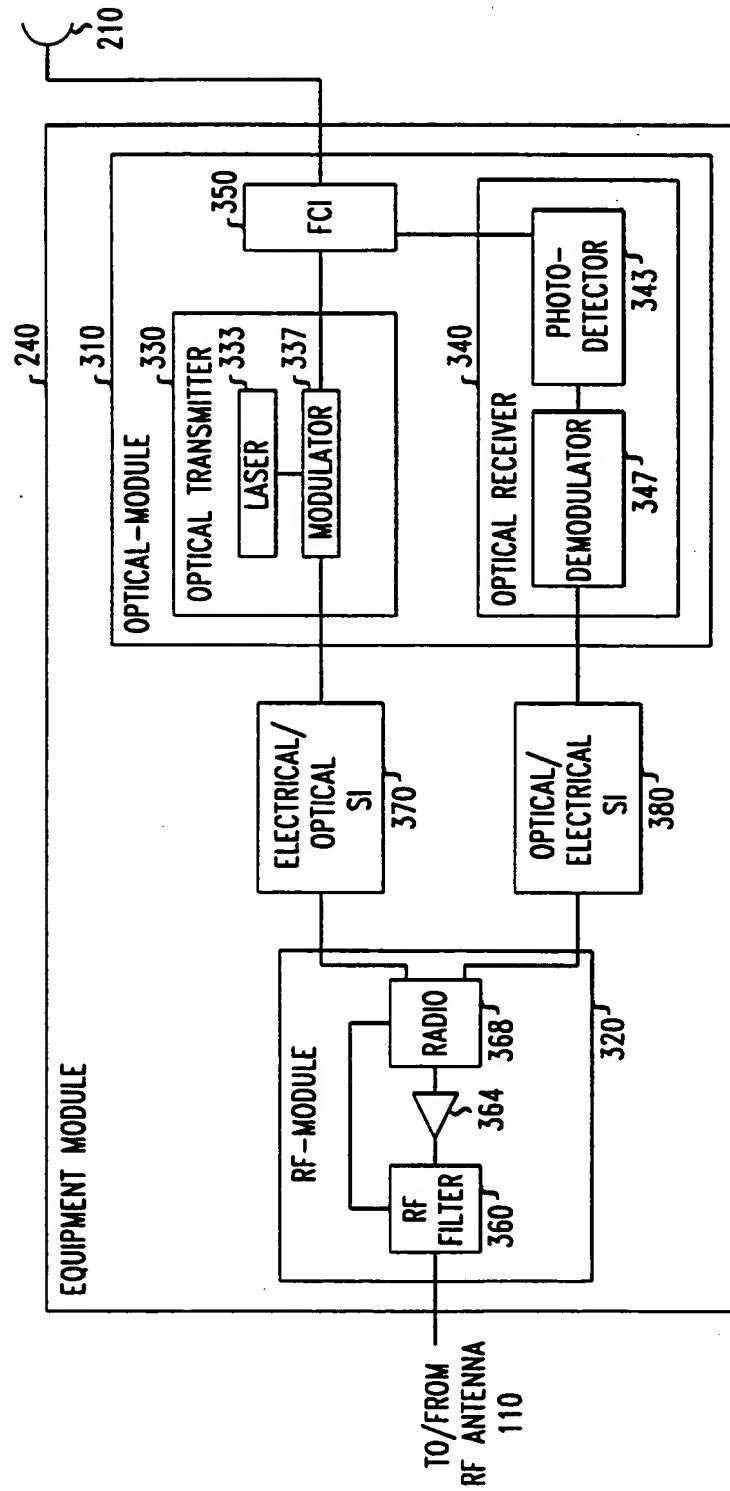


FIG. 4

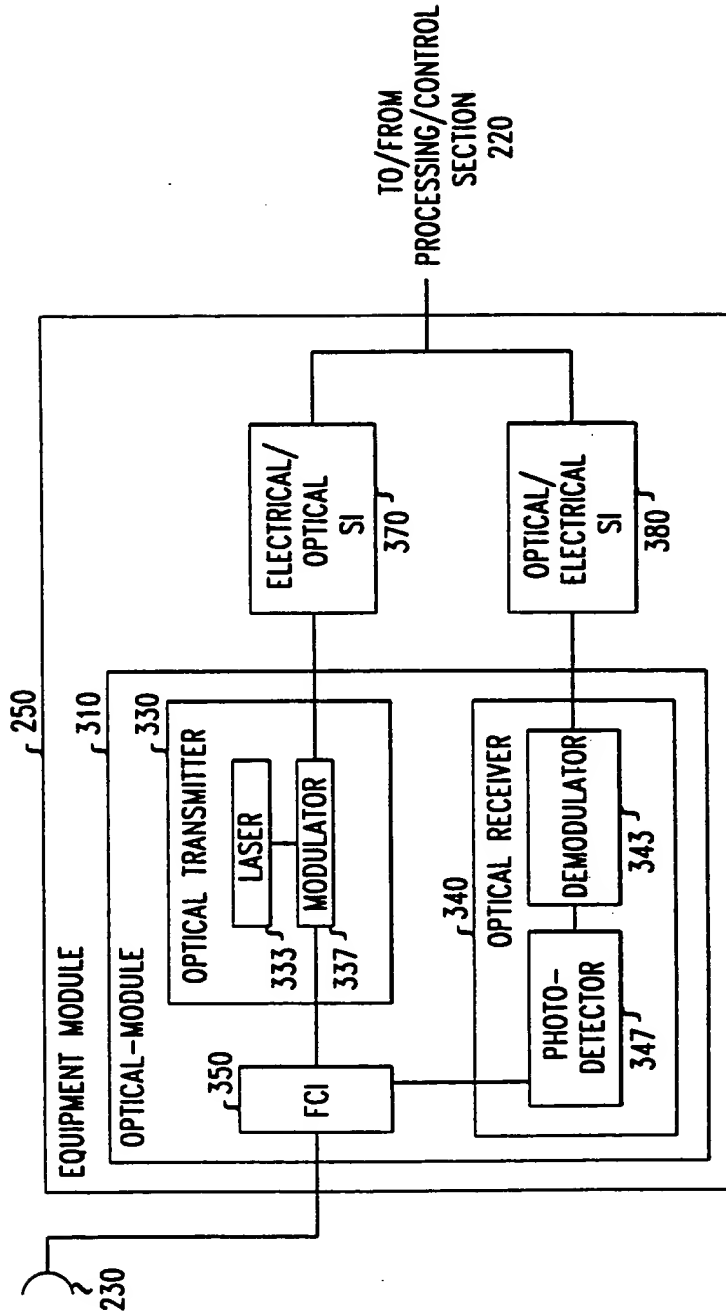


FIG. 5

